

I.D.	Fitting	Length	Model
1/4"	1/4" 1 rigid, 1 swivel	10'	A770A10 Color -PB
1/4"	1/4" 2 swivels	10'	A770B10 Color -PB
1/4"	1/4" 1 rigid, 1 swivel	15'	A770A15 Color -PB
1/4"	1/4" 2 swivels	15'	A770B15 Color -PB
1/4"	1/4" 1 rigid, 1 swivel	20'	A770A20 Color -PB
1/4"	1/4" 2 swivels	20'	A770B20 Color -PB
1/4"	1/4" 1 rigid, 1 swivel	25'	A770A25 Color -PB
1/4"	1/4" 2 swivels	25'	A770B25 Color -PB
1/4"	1/4" 1 rigid, 1 swivel	30'	A770A30 Color -PB
1/4"	1/4" 2 swivels	30'	A770B30 Color -PB
1/4"	1/4" 1 rigid, 1 swivel	50'	A770A50 Color
1/4"	1/4" 2 swivels	50'	A770B50 Color
3/8"	1/4" 1 rigid, 1 swivel	15'	A772AD15 Color -PB
3/8"	1/4" 2 swivels	15'	A772BD15 Color -PB
3/8"	3/8" 1 rigid, 1 swivel	15'	A772A15 Color -PB
3/8"	3/8" 2 swivels	15'	A772B15 Color -PB
3/8"	3/8" 1 rigid, 1 swivel	20'	A772A20 Color -PB
3/8"	1/4" 2 swivels	20'	A772BD20 Color -PB
3/8"	1/4" 1 rigid, 1 swivel	20'	A772AD20 Color -PB
3/8"	3/8" 2 swivels	20'	A772B20 Color -PB
3/8"	1/4" 1 rigid, 1 swivel	25'	A772AD25 Color -PB
3/8"	1/4" 2 swivels	25'	A772BD25 Color -PB
3/8"	3/8" 1 rigid, 1 swivel	25'	A772A25 Color -PB
3/8"	3/8" 2 swivels	25'	A772B25 Color -PB
3/8"	1/4" 1 rigid, 1 swivel	30'	A772AD30 Color -PB
3/8"	1/4" 2 swivels	30'	A772BD30 Color -PB
3/8"	3/8" 1 rigid, 1 swivel	30'	A772A30 Color -PB
3/8"	3/8" 2 swivels	30'	A772B30 Color -PB
3/8"	3/8" 2 swivels	50'	A772A50 Color
.467"	1/2" 2 swivels	15'	A774B15 Color -PB
.467"	1/2" 2 swivels	20'	A774B20 Color -PB
.467"	1/2" 2 swivels	25'	A774B25 Color -PB
.467"	1/2" 2 swivels	30'	A774B30 Color


FLEXCOIL® POLYURETHANE COILED AIR HOSE

Flexcoil is the finest polyurethane air hose on the market today and eliminates the two most common limitations of other self-storing air hoses – kinking and abrasion. This lightweight, yet extremely durable hose will withstand the rigors of tough industrial environments while maintaining its resiliency over a long period of time. Swivel fitting is provided with thread seal, eliminating the need for sealing tape or paste.

Features:

- Outstanding coil memory.
- Highly kink and abrasion resistant.
- Straight tails provide built-in whip hose.
- Resistant to most oils and fuels.

See page 32 for replacement fittings.

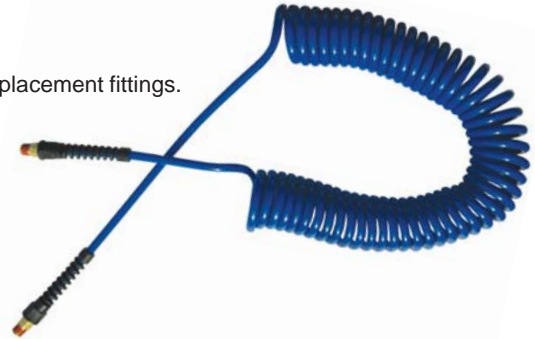

Color Code	
Blue B
Red R
Yellow Y
Neon Green G
Transparent Blue	... T

Hose I.D.	Hose O.D.	Temperature Range	Working Pressure at 70° F
1/4"	3/8"	- 40° F to 165° F	145 PSI
3/8"	9/16"	- 40° F to 165° F	135 PSI
.467"	3/4"	- 40° F to 165° F	125 PSI

I.D.	Fitting	Length	Model
1/4"	1/4" 1 rigid, 1 swivel	12'	A762A12-PB
1/4"	1/4" 2 swivels	12'	A762B12-PB
1/4"	1/4" 1 rigid, 1 swivel	25'	A762A25-PB
1/4"	1/4" 2 swivels	25'	A762B25-PB
1/4"	1/4" 1 rigid, 1 swivel	50'	A762A50
1/4"	1/4" 2 swivels	50'	A762B50
1/4"	No Fittings	100'	A762
3/8"	1/4" 1 rigid, 1 swivel	12'	A764AD12-PB
3/8"	3/8" 1 rigid, 1 swivel	12'	A764A12-PB
3/8"	1/4" 2 swivels	12'	A764BD12-PB
3/8"	3/8" 2 swivels	12'	A764B12-PB
3/8"	1/4" 1 rigid, 1 swivel	25'	A764AD25-PB
3/8"	3/8" 1 rigid, 1 swivel	25'	A764A25-PB
3/8"	1/4" 2 swivels	25'	A764BD25-PB
3/8"	3/8" 2 swivels	25'	A764B25-PB
3/8"	1/4" 1 rigid, 1 swivel	50'	A764AD50
3/8"	3/8" 1 rigid, 1 swivel	50'	A764A50
3/8"	1/4" 2 swivels	50'	A764BD50
3/8"	3/8" 2 swivels	50'	A764B50
3/8"	No Fittings	100'	A764
1/2"	1/2" 2 swivels	12'	A766-B12-PB
1/2"	1/2" 1 rigid, 1 swivel	25'	A766A25-PB
1/2"	1/2" 2 swivels	25'	A766B25-PB
1/2"	1/2" 1 rigid, 1 swivel	50'	A766A50
1/2"	1/2" 2 swivels	50'	A766B50
1/2"	No Fittings	100'	A766

NYLON COILED AIR HOSE

Features:

- Lightweight and permanently coiled.
- Quality nylon formulation resists moisture absorption and abrasion.
- Each assembly is supplied with durable brass compression fittings, tube inserts and hose ferrules.
- Spring guards are also provided on all assemblies, except 3/4".

See page 32 for replacement fittings and repair kit.



Hose I.D.	Hose O.D.	Temperature Range	Working Pressure at 70° F
1/4"	.305/.313	-60° F to 200° F	185 PSI
3/8"	.465/.475	-60° F to 200° F	165 PSI
1/2"	.620/.630	-60° F to 200° F	170 PSI



To order, call 732-432-7177.