


INFLATOR GAUGES WITH A CHROME FINISH 10 - 90 lbs. and 10 - 120 lbs.

Features:

- Chrome-plated zinc body; brass internal components.
- Two position lever for gauging and inflating operations.
- Durable metal indicator bar is triangular for easy viewing.
- 1/4" FPT inlet and 3/8 UNF female hose connection.
- Calibrated 10 - 120 lbs. in two pound increments.
- A bleeder valve or other form of deflation is required for some parts.

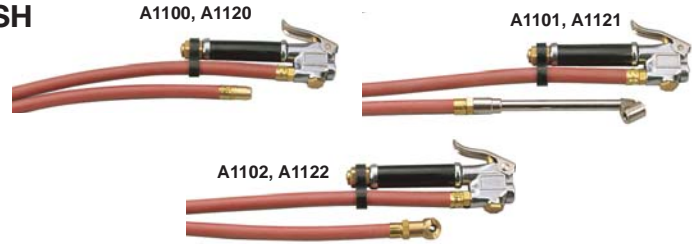

See page 8 for accessories.

Gauge Type	PSI	Hose Length	Head Type	Bleeder	Measurement	Model	Display Model
Inflator	10 - 90	9"	Swivel ball foot chuck	No	PSI / kPa	A1122	-
Inflator	10 - 90	12"	Straight push-on chuck	No	PSI / kPa	A1120	A1120-PB
Inflator	10 - 90	12"	Swivel dual foot chuck extension	No	PSI / kPa	A1121	-
Inflator	10 - 90	12"	Straight-on dual foot chuck extension	No	PSI / kPa	A1127	-
Inflator	10 - 90	-	Gauge body only	No	PSI / kPa	A1126	-
Inflator	10 - 120	12"	Straight push-on chuck	No	PSI / kPa	A1100	-
Inflator	10 - 120	12"	Dual foot chuck extension	No	PSI / kPa	A1101	A1101-PB
Inflator	10 - 120	12"	Swivel ball foot chuck	No	PSI / kPa	A1102	-
Inflator	10 - 120	12"	Straight-on dual foot chuck extension	No	PSI / kPa	A1103	-
Inflator	10 - 120	36"	1/4" MPT	No	PSI / kPa	A1106-36	-
Inflator	10 - 120	48"	Lock-on chuck	Yes	PSI / kPa	A1104	-
Inflator	10 - 120	48"	Ball foot chuck and clip	Yes	PSI / kPa	A1105	-
Inflator	10 - 120	72"	Ball foot chuck and clip	Yes	PSI / kPa	A1105-72	-
Inflator	10 - 120	-	Gauge body only	No	PSI / kPa	A1106	-

COMMERCIAL-QUALITY INFLATOR GAUGE 10 - 90 lbs.

Features:

- Chrome-plated casting, brass internals, heavy duty valve and plated steel chuck.
- Straight-on tapered chuck inflator design.
- Comes with a 12" heavy duty rubber hose.
- 1/4" NPT female inlet.
- Easy to read and measures in 2 lb. increments.
- Commonly used on coin-operated tire inflators at gas stations.



Model number: A1300
(A1300-DPB for display packaging)

PROFESSIONAL-GRADE WINDOW TIRE INFLATOR GAUGES 10 - 120 lbs. and 10 - 160 lbs.

Features:

- Easy-to-read, dual calibrated (PSI and kPa) internal pressure reading indicator.
- Provides easy and controlled tire inflation.
- 1/4" FPT inlet connection to direct air lines; 3/8 - 24 UNF male hose connection outlet.



A1500 Series



A1600 Series

Gauge Type	PSI	Hose Length	Head Type	Bleeder	Measurement	Model	Display Model
Inflator	10 - 120	12"	Straight push-on chuck	No	PSI / kPa	A1500	A1500-BL
Inflator	10 - 120	12"	Dual heavy duty chuck	No	PSI / kPa	A1501	A1501-BL
Inflator	10 - 120	12"	Ball chuck	No	PSI / kPa	A1502	A1502-BL
Inflator	10 - 120	12"	Straight-on dual chuck	No	PSI / kPa	A1503	A1503-BL
Inflator	10 - 160	12"	Straight push-on chuck	No	PSI / kPa	A1600	-
Inflator	10 - 160	12"	Dual heavy duty chuck	No	PSI / kPa	A1601	-
Inflator	10 - 160	12"	Ball chuck	No	PSI / kPa	A1602	-
Inflator	10 - 160	12"	Straight-on dual chuck	No	PSI / kPa	A1603	-



To order, call 732-432-7177.