


UNIVERSAL AUTOMATIC COUPLERS

Features:

- Fits the three most popular 1/4" Interchange connectors: Industrial, Automotive / Tru-Flate and ARO.
- For use where there are connectors of different Interchanges in use in the same application or in the same shop.
- All-brass body and sleeve construction, stainless steel valve and sleeve springs, and nitrile (Buna-N) seals and o-rings.

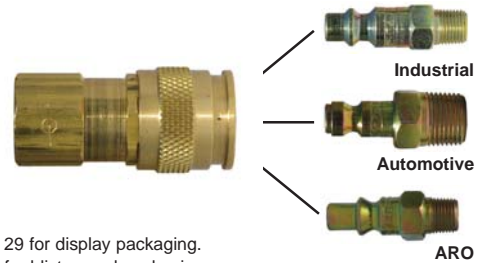


- ◆ See page 29 for display packaging.
- Add "-BL" for blister card packaging.

Body Size	Part Number Prefix	Thread and Barb Size	Female Model	Male Model	Hose Barb Model	Lock-On Hose Barb Model
1/4"	A937	1/4"	A937B4FU ◆ ●	A937B4MU ●	-	-

COMPOSITE NON-MARRING COUPLERS

Features:

- Manufactured out of a heavy-duty, high-impact fiberglass composite, which protects finished surfaces from scratching and marring that can occur with brass or steel couplers.
- Industrial Interchange Safety couplers offer additional protection against "hose whip" upon disconnection by safely bleeding off air line pressure through a two-step release mechanism.
- Megaflow™ couplers are engineered to deliver much higher flow than comparably-sized standard-design couplers and connectors, and are ideal for PB&E (Paint Body & Equipment) and other high-CFM applications.

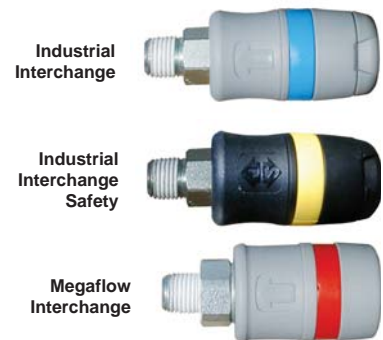

Body Size	Coupler Type	Thread and Barb Size	Female Model	Male Model
1/4"	Industrial	1/4"	A923B4F-PB	A923B4M-PB
1/4"	Industrial, Safety	1/4"	A923SB4F-PB	A923SB4M-PB
1/4"	Megaflow	1/4"	A923MB4F-PB	A923MB4M-PB

	Industrial	Safety	Megaflow
Air flow at 100 PSI:	45 CFM	45 CFM	78 CFM
Temperature Range:	5° F - 160° F	5° F - 160° F	5° F - 160° F
Working Pressure:	175 PSI	175 PSI	175 PSI
Function:	Single release	Double release	Single release
Locking Device:	2 Pawls	4 Pawls	2 Pawls

STEEL COUPLERS AND CONNECTORS

Features:

- All-steel construction make these quick disconnects an excellent choice for higher-impact and higher-vibration applications.
- Silver-chromate finish guards against corrosion and deterioration.
- Drag guard helps prevent accidental coupler disconnection.



Body Size	Interchange	Thread and Barb Size	Coupler Model	Connector Model	5 Pack Coupler Model	5 Pack Connector Model
1/4"	ARO	1/4" FPT	A918B4FS	A918N4F	A918B4FS-T5	A918N4F-T5
1/4"	ARO	1/4" MPT	A918B4MS	A918N4M	A918B4MS-T5	A918N4M-T5
1/4"	Automotive	1/4" FPT	A925B4FS	A925N4F	A925B4FS-T5	A925N4F-T5
1/4"	Automotive	1/4" MPT	A925B4MS	A925N4M	A925B4MS-T5	A925N4M-T5
1/4"	Industrial	1/4" FPT	A937B4FS	A937N4F	A937B4FS-T5	A937N4F-T5
1/4"	Industrial	1/4" MPT	A937B4MS	A937N4M	A937B4MS-T5	A937N4M-T5

Five pack display packaging is also available for brass couplers and connectors.



To order, call 732-432-7177.